










## COLORBOND® ULTRA RECOMMENDED ROOFING AND CLADDING WARRANTY GUIDE

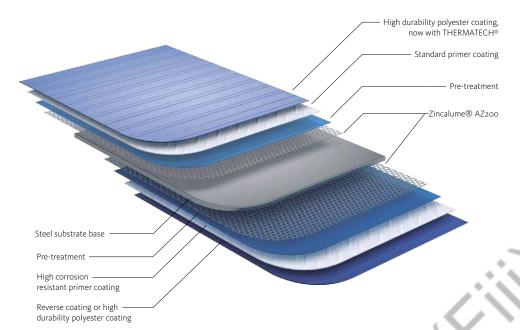

#### **VERY SEVERE**

10 years: covering the paint surface against flaking and peeling.

**12 years:** against perforation as a result of corrosion.

#### **SEVERE**


15 years: covering the paint surface against flaking and peeling.15 years: against perforation as a result of corrosion.

#### MODERATE

15 years: covering the paint surface against flaking and peeling.
20 years: against perforation as a result of corrosion.

# Colorbond XRW PROVEN COLOURS FOR THE PACIFIC

### COLORBOND® XRW RECOMMENDED ROOFING AND CLADDING WARRANTY GUIDE

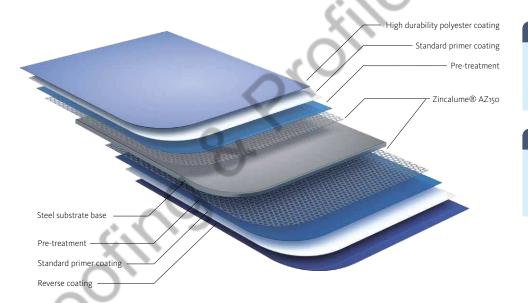

#### SEVERE

10 years: covering the paint surface against flaking and peeling.
10 years: against perforation as a result of corrosion.

#### MODERATE

 10 years: covering the paint surface against flaking and peeling.
 10 years: against perforation as a result of corrosion.

#### ISO CATEGORY DESCRIPTIONS

#### VERY SEVERE - ISO Category E

- Heavy salt deposits.
- The almost constant smell of salt spray in the air.
- Close to exposed coast lines (typically 50-200 metres).

This environment may be extended inland by prevailing winds and local conditions.

#### SEVERE - ISO Category D

- Light salt deposits.
- A frequent smell of salt in the air.
- Typically 200-500 metres from exposed coastlines.
- In the vicinity of large expanses of calm salt water.

This environment may be extended inland by prevailing winds and local conditions.

#### MODERATE - ISO Category C

- No obvious marine or industrial influences.
- Little or no salt deposits. The occasional smell of salt in the air.
- Typically 500-1000 metres from the coastline or more than 500 metres from industrial emissions or in the immediate vicinity of calm salt water.



COLORBOND® ULTRA steel has been designed for the tough conditions encountered in the Pacific Islands. Perfect for everything from residential homes to commercial buildings both inland and coastal, it's a durable product that looks great and is made to last.

COLORBOND® ULTRA with THERMATECH™ technology reflects more of the sun's rays, helping to keep buildings cool in the summer, while its ZINCALUME® substrate provides greater corrosion protection and peace of mind.





COLORBOND® XRW is a non-combustible, lightweight and secure product offering maximum flexibility in colour choice and exceptional value for money. Developed specifically for use throughout Australasia and the Pacific, COLORBOND® XRW performs in light, moderate and severe environments.

Its ZINCALUME® substrate with zinc/aluminium coating of 150g/m², COLORBOND® XRW is a cost-effective way to protect your residential or commercial building for many years to come.





COLORCLAD® is a select range of strong and vibrant designer colours developed specifically for commercial and industrial cladding applications.

COLORCLAD® prepainted steel has a ZINCALUME® substrate with a zinc/aluminium coating of 150g/m². The durable primers and baked-on paint finish provides excellent appearance and colour retention.





For more information about COLORBOND® prepainted steel:

Phone +64 9 375 8999

Email nzexport@nzsteel.co.nz

www.nzsteel.co.nz

The colours shown in this brochure are as close as normal printing processes allow and should be viewed under exterior lighting conditions. To see exact COLORBOND® prepainted steel samples, please contact your local COLORBOND® roofing supplier.

Buyers and users of New Zealand Steel products and services must make their own assessment of the products for their own conditions. All queries regarding product specification, purpose or application should be directed to New Zealand Steel, phone +64 9-375-8999.

New Zealand Steel reserves the right to modify products, techniques, equipment and statements to reflect improvements in the manufacture and application of its products. The information contained in this brochure is supplied without prejudice to New Zealand Steel's standard terms and conditions of sale.

The warranty related information in this brochure is for guidance only. This brochure does not constitute the actual warranty.

In the event there is conflict between this information and the standard terms and conditions, the standard terms and conditions prevail. This brochure supersedes all previous editions of COLORBOND® XRW, COLORBOND® ULTRA and COLORCLAD® colour charts.

COLORBOND® and ZINCALUME® are registered trademarks of BlueScope Steel Limited. THERMATECH<sup>TM,</sup> Surf Mist<sup>TM</sup>, Dune<sup>TM</sup>, Windspray<sup>TM</sup>, Woodland Grey<sup>TM</sup>, Paper Bark<sup>TM</sup>, Jasper<sup>TM</sup>, Headland<sup>TM</sup>, Pale Eucalypt<sup>TM</sup>, Wilderness<sup>TM</sup>, Manor Red<sup>TM</sup>, Deep Ocean<sup>TM</sup>, Shale Grey<sup>TM</sup>, Cottage Green<sup>TM</sup> and Classic Cream<sup>TM</sup> are trademarks of BlueScope Steel Limited. COLORCLAD® is a registered trademark of New Zealand Steel Limited.

Note: standard warranties don't cover structures o-50m from breaking surf. Copyright\* New Zealand Steel Limited, January 2016.









