


RPFL SuperDek® Colorbond® XRW/Ultra 0.42BMT/0.48BMT wall cladding. Base Materials: Steel Grade G550. BMT 0.42. Mass 4.3kg/m² or 0.48BMT 4.9kg/m². AZ 150 coating for XRW & AZ 200 coating for Ultra. Minimum Roof Pitch 2 degree. Profiles tested for Cyclonic Conditions.

Kingspan AIR-CELL Insulbreak® 65 R2.4 Self-Supported 3-in-1 Insulation Vapour Barrier and Radiant Barrier

20mm thick cavity batten.

Top & Bottom Infill Strips/filler block or profiled foam fillers insert between cladding and flashing.

Continuous cavity drainage closure strip

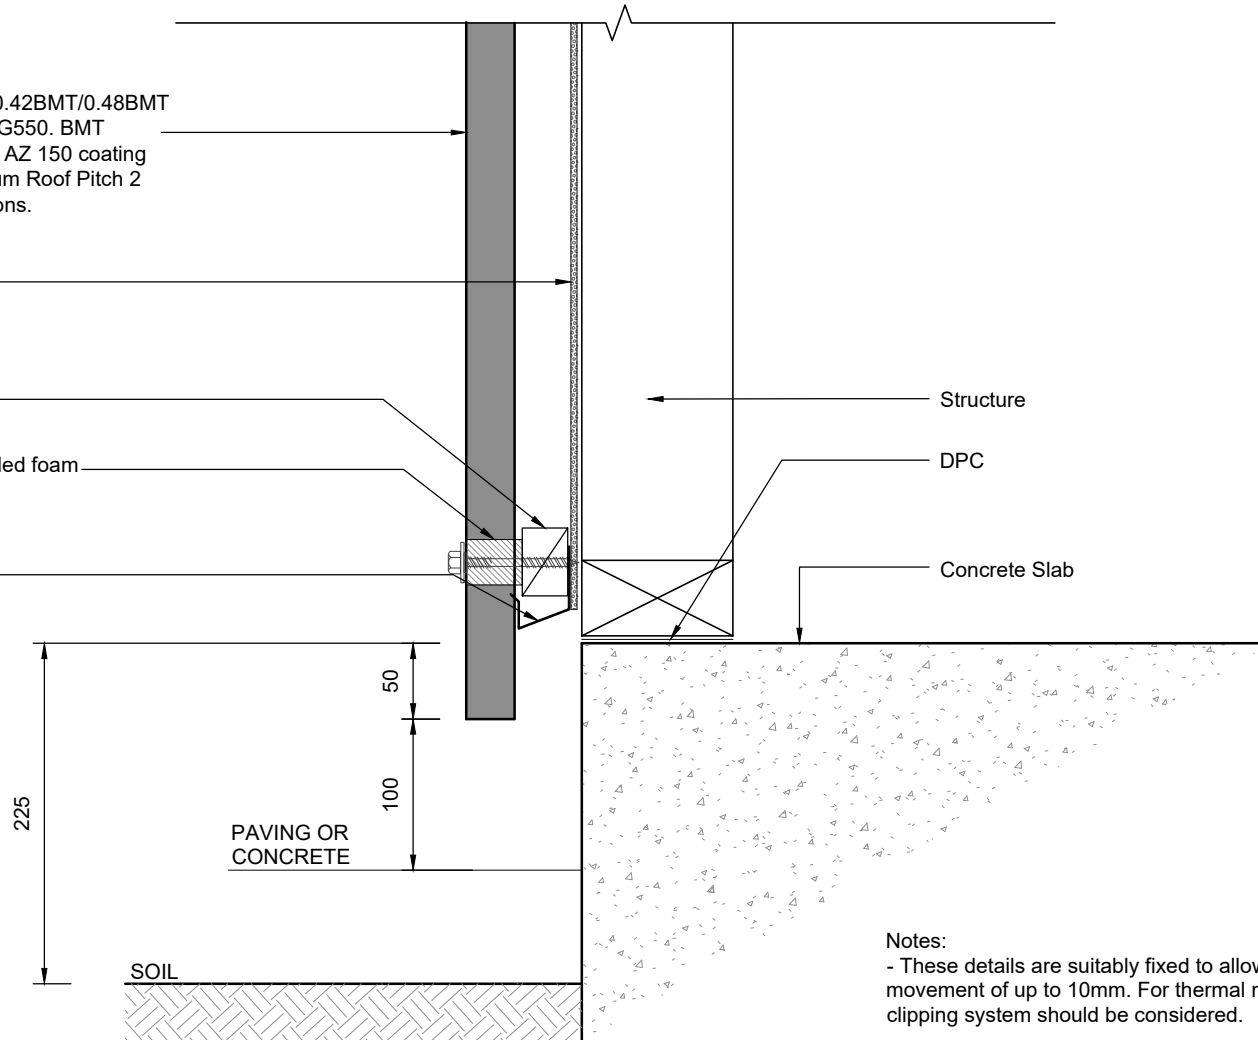

Notes:
 - These details are suitably fixed to allow for a theoretical thermal movement of up to 10mm. For thermal movement greater than this a clipping system should be considered.



ROOFING & PROFILES (FIJI) LTD
 PH: (679) 6673764. Mob: 9999 309
 EMAIL: info@roofingandprofiles.com.fj

This drawing is the property of Roofing & Profiles (Fiji) Ltd and must not be copied or disclosed to any third party without the written consent of the company.
 ALL DIMENSIONS ARE IN mm UNLESS STATED

PROJECT TITLE:
 WALL DETAILS
 DRAWING TITLE:
 SHOP DRAWING

Nos:	Revision:		
1.			
2.			
3.			
4.			
5.			

DRAWN: R. Lal

SCALE: 1:5 @ A4

SHEET No: SD 2200

DATE: 13/01/2021

REVISION No:

REVISION TITLE:

CHECKED BY: -

APPROVED BY: -

JOB NUMBER: