


50 dia Pipe through roof cladding

RPFL Roof Dektite®. Dektite® EPDM polymer flashing has been officially tested by the Coal Corporation of Victoria. Australia.

RPFL SuperDek® Colorbond® XRW/Ultra 0.42BMT/0.48BMT roof cladding. Base Materials: Steel Grade G550. BMT 0.42. Mass 4.3kg/m² or 0.48BMT 4.9kg/m². AZ 150 coating for XRW & AZ 200 coating for Ultra. Minimum Roof Pitch 2 degree. Profiles tested for Cyclonic Conditions.

Kingspan AIR-CELL Insulbreak @65 R2.4 Self-Supported 3-in-1 Insulation Vapour Barrier and Radiant Barrier

Bayonet Roof Safe Netting consists of a hexagonal, 113mm flat mesh, manufactured from 1.0mm diameter galvained mild steel wire with 2 reinforcing wires of 1.2mm dia. 113mm roof safe netting is supplied in rolls 1800mm wide in lengths of 50m. Netting conforms to Class W02 of AS/NZS 4534:2006. Minimum mass of gal coating is 25g/m² for 1.0mm dia wire.

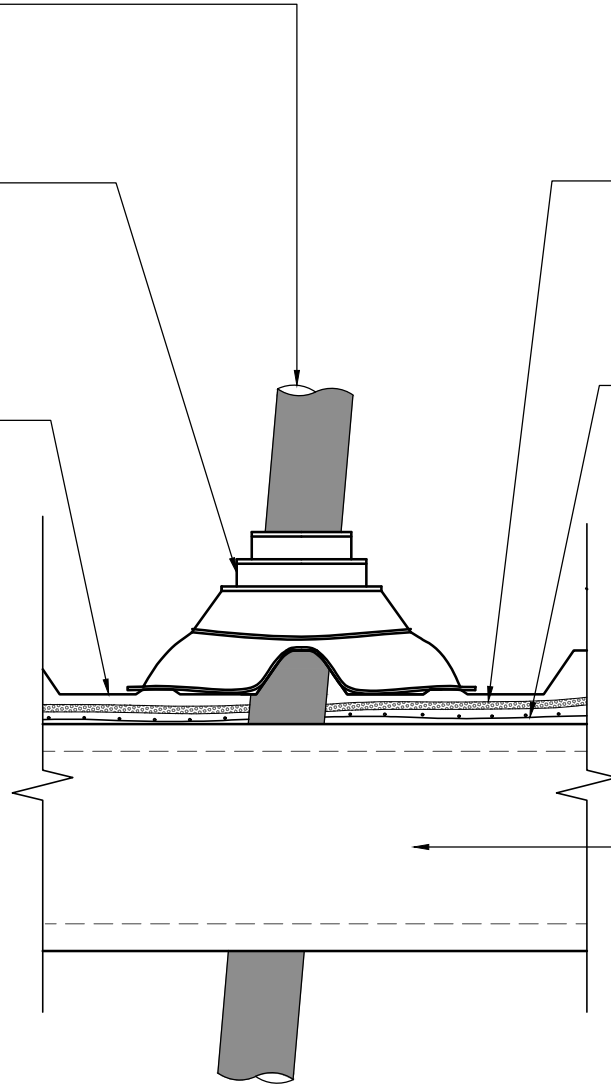

RPFL Zed & Cee sections are roll formed from GALVSTEEL, complying with AS1397-2001. Metal thickness is 1.5, 1.9 & 2.4mm. BMT G450, Z450.



ROOFING & PROFILES (FIJI) LTD
 PH: (679) 6673764. Mob: 9999 309
 EMAIL: info@roofingandprofiles.com.fj

This drawing is the property of Roofing & Profiles (Fiji) Ltd and must not be copied or disclosed to any third party without the written consent of the company.
 ALL DIMENSIONS ARE IN mm UNLESS STATED

PROJECT TITLE:
 ROOF DEKTITE DETAILS

DRAWING TITLE:
 SHOP DRAWING

Nos:	Revision:		
1.			
2.			
3.			
4.			
5.			

DRAWN: R. Lal

DATE : 05/01/2021

CHECKED BY: -

SCALE: 1:5 @ A4

REVISION No:

APPROVED BY: -

SHEET No : SD 2230

REVISION TITLE:

JOB NUMBER: