


Vent seal against flashing

RPFL Std Colorbond® XRW/Ultra 0.55 BMT L Shaped Flashing. Base Materials: coating AZ150/AZ200 Steel Grade G300. fixed to cladding with SDM screws

## Note:

These details are suitably fixed to allow for a theoretical thermal movement of up to 10mm. For thermal movement greater than this a clipping system should be considered.

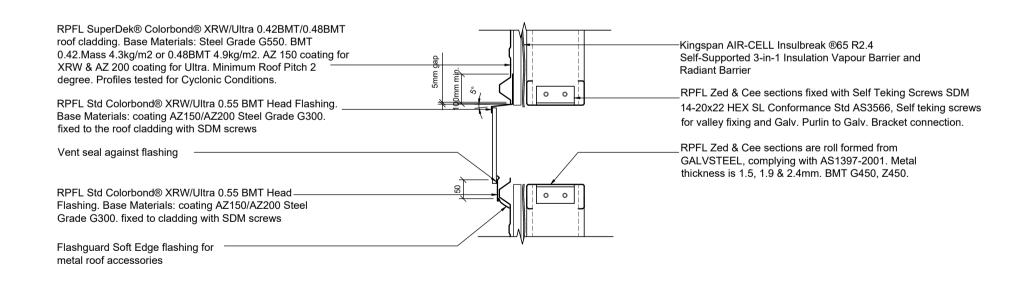

RPFL
ROOFING & PROFILES (FIJI) LTD
PH: (679) 6673764. Mob: 9999 309
EMAIL: info@roofingandprofiles.com.f

This drawing is the property of Roofing & Profiles (Fiji) Ltd and must not be copied or disclosed to any third party without the written consent of the company.
ALL DIMENSIONS ARE IN mm UNLESS STATED

PROJECT TITLE: VENT DETAILS

DRAWING TITLE:

Nos:	Revision:	
1.		
2.		
3.		
4.		
5.		

l	DRAWN: R. Lal	SCALE: 1:7.5 @ A4	SHEET No: SD 2250
	DATE: 04/ 01 /2021	REVISION No:	REVISION TITLE:
	CHECKED BY: -	APPROVED BY: -	JOB NUMBER: